

ZCAT2436-1330A



| | |
|------------------------------|------------------|
| Applications | Commercial Grade |
| Product Type | Fixed cable type |
| Applicable Cable Size | Φ10mm to Φ13mm |
| Series | ZCAT |
| Status | Production |
| Brand | TDK |



| Size | |
|------|-----------------|
| A | 36.00mm ±1.00mm |
| B | 29.00mm ±1.00mm |
| C | 13.00mm ±1.00mm |
| D | 23.50mm ±1.00mm |
| E | 22.00mm ±1.00mm |

| Electrical Characteristics | |
|----------------------------|--------------------|
| Impedance (Min.) / Ω | 30 (10 to 100MHz) |
| | 80 (100 to 500MHz) |


| Other | |
|-----------------------|-------------|
| Operating Temp. Range | -40 to 85°C |
| AEC-Q200 | NO |
| Case Color | Gray |
| Package Quantity | 400pcs |
| Weight | 29g |

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

ZCAT2436-1330A



Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

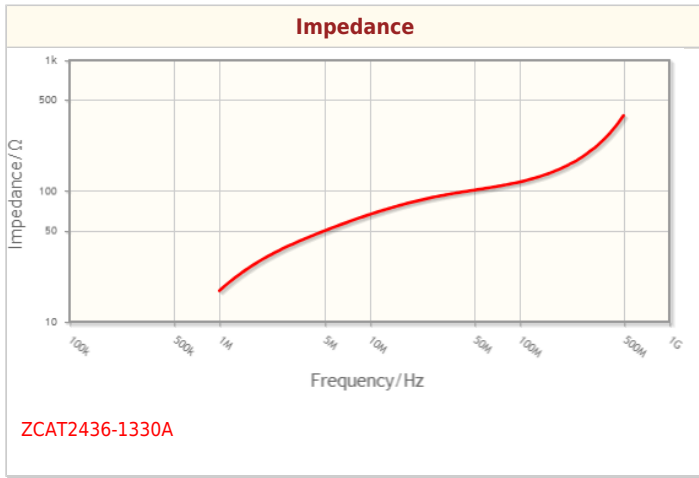

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.

ZCAT2436-1330A



Associated Images

