

# ***motoRobot.com***

## **Parameter description** **L-P**



# **Metal**

## **power switch button**

## Parameter Description

### Electrical parameters

**LED voltage:** 3~220V  
**LED current:** 3mA~20mA  
**LED light color:** red, yellow, blue, green, white, Two-color, three-color (Customizable multi-color)

### Other Ratings

**waterproof level:** Ip67  
**Protection class:** Ik10  
**Lamp bead life:** 40000 hours  
**Insulation resistance:**  $\geq 1000\text{m}\Omega$   
**Compressive strength:** 1900VACmin

### Materials & Finishes

**shell:** Nickel plated brass  
**Base:** Pa66  
**Wire:** 26AWG

### Environmental Data


**Operating Temperature Range:** -30°C through +85°C

### Installation

**Installation aperture:** 6/8/10/12mm


L-P

Standard model illustration example  
Switch configuration and accessories

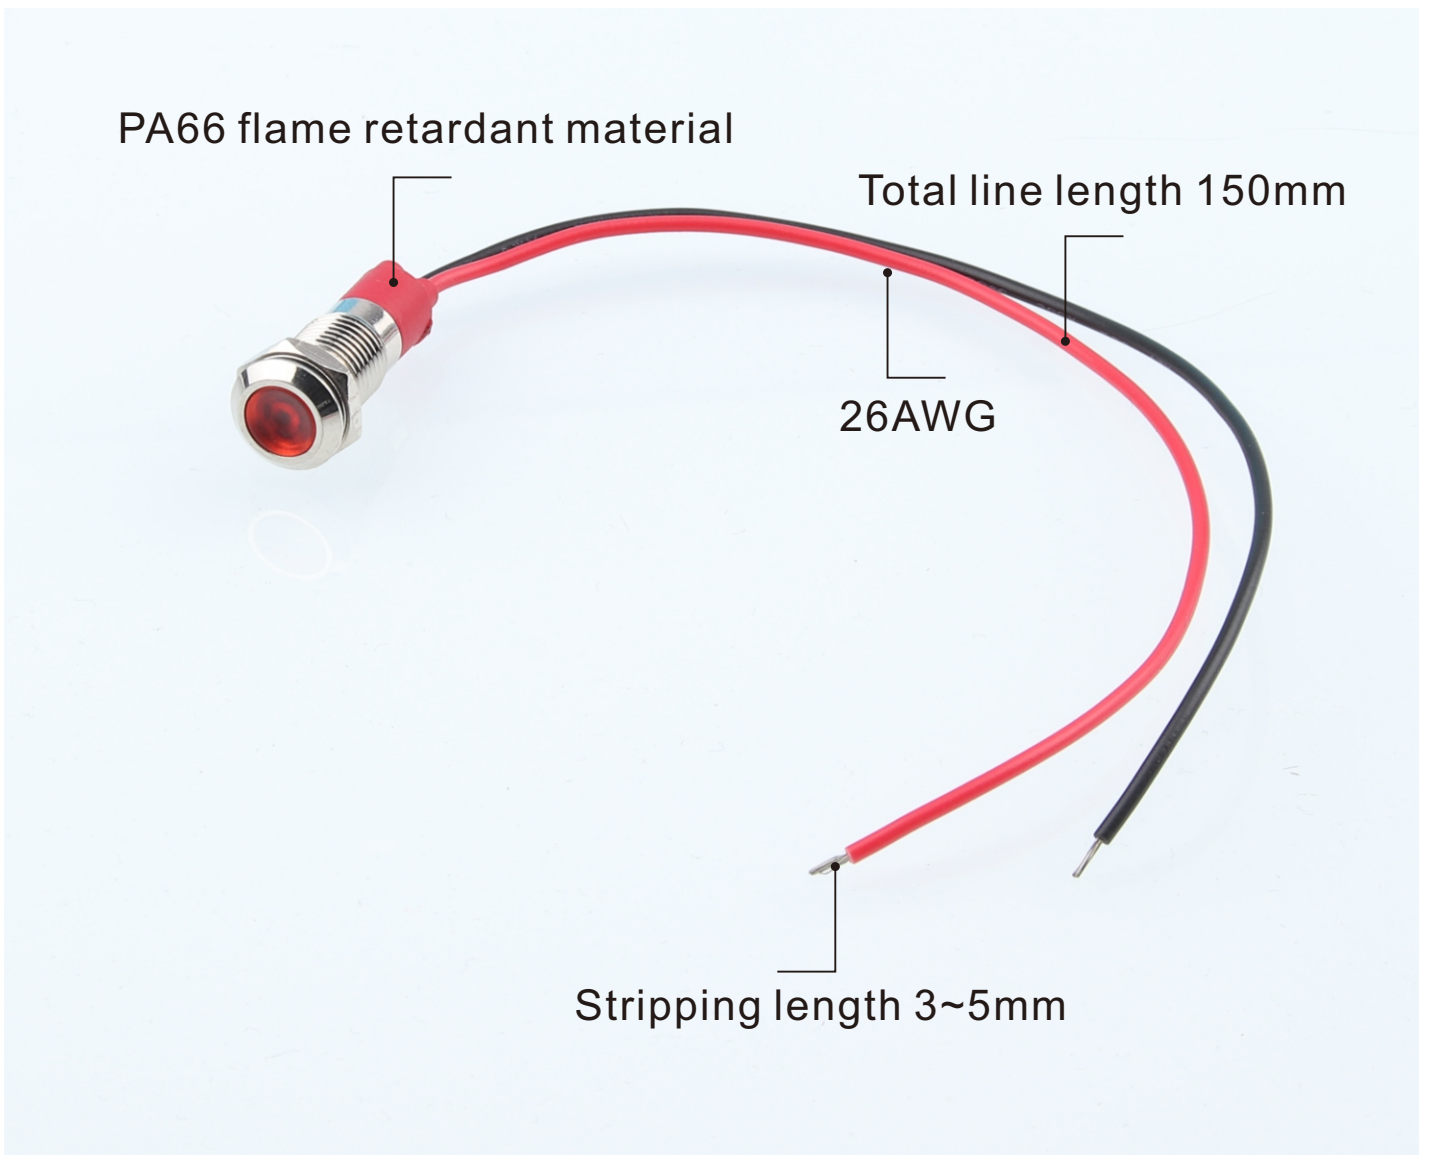


# Size and material application


6L-P

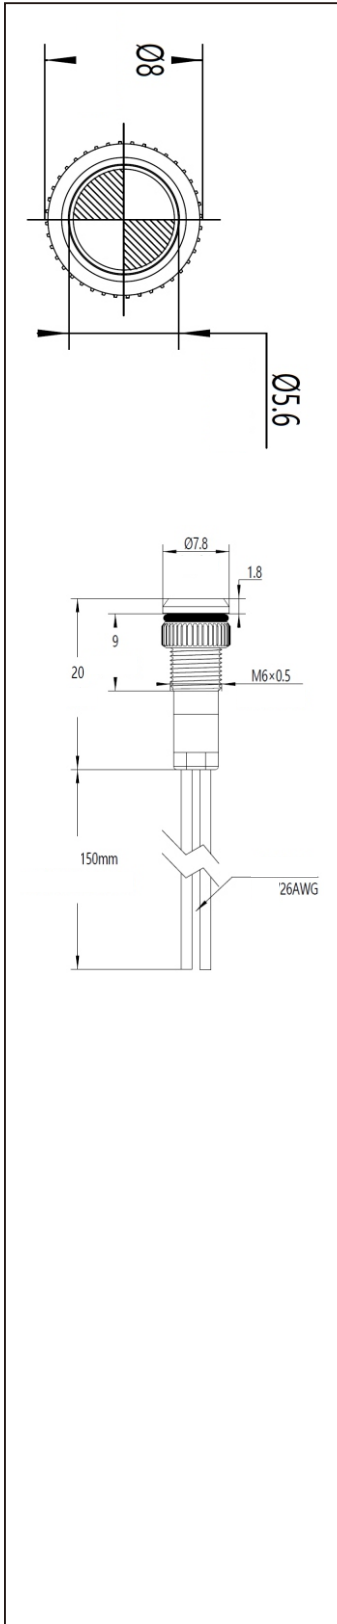

8L-P

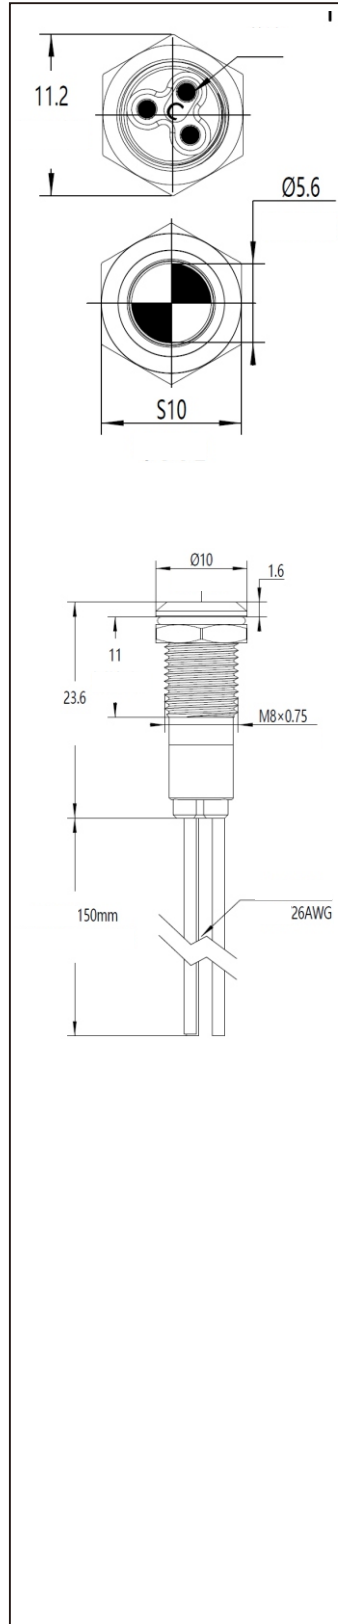

10L-P

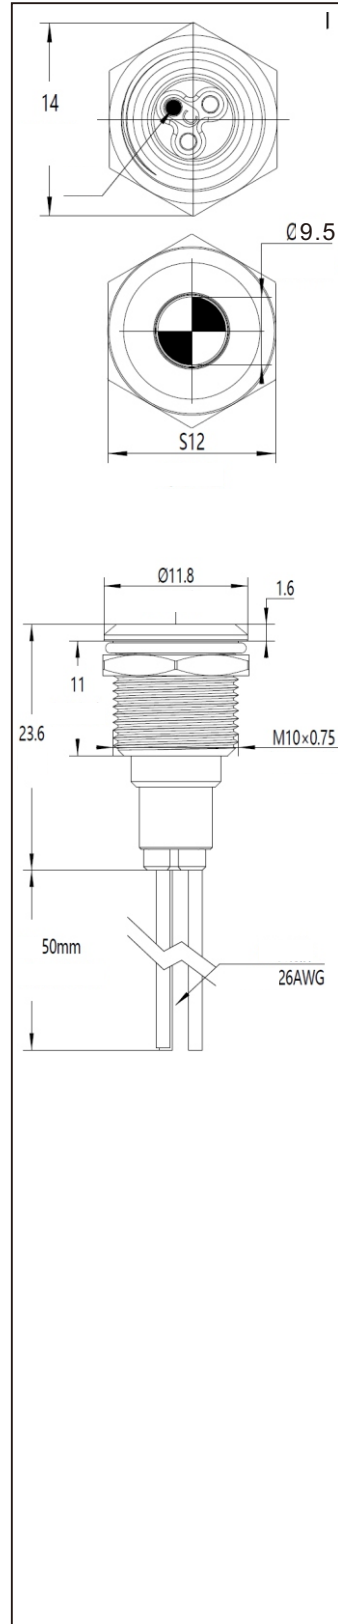

12L-P

