
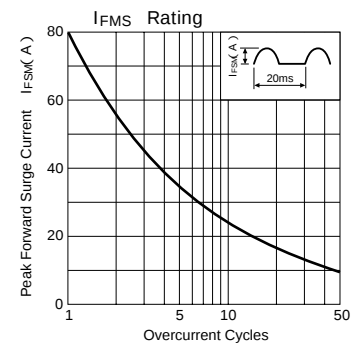
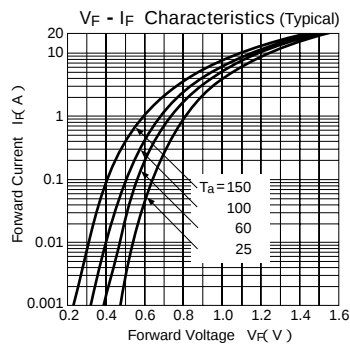





Bridge Diodes (Ultra-Fast-Recovery)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta = 25)								Others	
	V _{RM} (V)	I _R AV (A) With Heatsink	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _J ()	T _{stg} ()	V _F (V)	I _R (mA)	I _R (H) (mA)	t _{rr} (ns)		t _{rr} (ns)	R _{th} (j - c) (/ W)	Mass (g)	Fig.	
RBA-402L	200	4.0	80	- 40 to + 150		max per element	I _F (A)	V _R = V _{RM} max per element	V _R = V _{RM} , Ta = 100 max per element		I _F /I _{RP} (mA)		I _F /I _{RP} (mA)		
RBV-602L		6.0	100			0.98	2.0	0.05	0.1	40	100/100	30	100/200	5.0	4.05
						1.0	3.0	0.25	1.0	50		35	3.0	6.45	Ⓑ

RBA-402L



RBV-602L

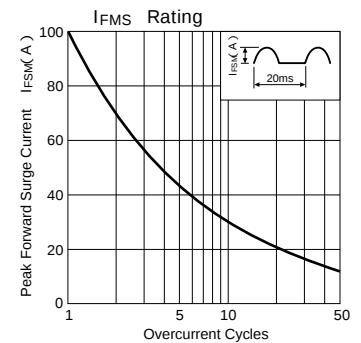

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

Fig. (A)

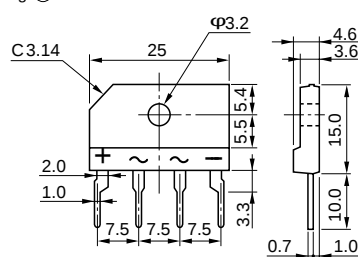


Fig. (B)

