



NOT FOR NEW DESIGN

8W CAR RADIO AUDIO AMPLIFIER

The TDA2002 is a class B audio power amplifier in Pentawatt® package designed for driving low impedance loads (down to 1.6Ω).

The device provides a high output current capability (up to 3.5A), very low harmonic and cross-over distortion.


In addition, the device offers the following features:

- very low number of external components
- assembly ease, due to Pentawatt® power package with no electrical insulation requirement
- space and cost saving
- high reliability
- flexibility in use

Protection against:

- a) short circuit;
- b) thermal over range;
- c) fortuitous open ground;
- d) load dump voltage surge.


See TDA2003 for more complete information.

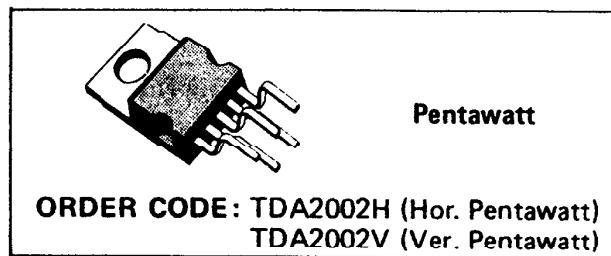

ABSOLUTE MAXIMUM RATINGS

V_s	Peak supply voltage (50 ms)	40	V
V_s	DC supply voltage	28	V
V_s	Operating supply voltage	18	V
I_o	Output peak current (repetitive)	3.5	A
I_o	Output peak current (non repetitive)	4.5	A
P_{tot}	Power dissipation at $T_{case} = 90^\circ\text{C}$	15	W
T_{stg}, T_j	Storage and junction temperature	-40 to 150	$^\circ\text{C}$

Fig. 1 - Application circuit

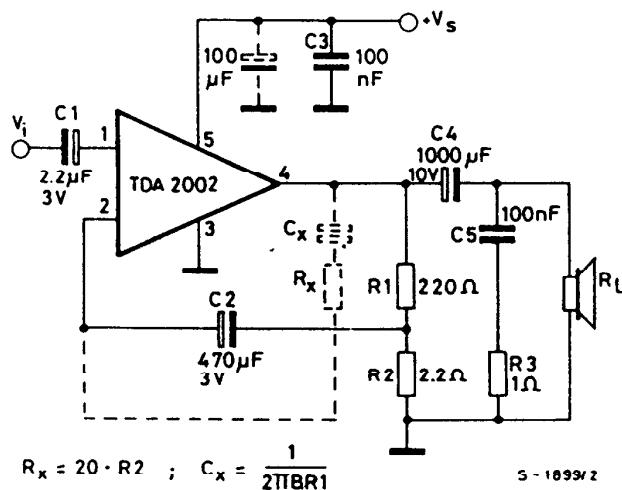



ELECTRICAL CHARACTERISTICS ($V_s = 14.4V$, $T_{amb} = 25^\circ C$ unless otherwise specified)

Parameter	Test conditions	Min.	Typ.	Max.	Unit
-----------	-----------------	------	------	------	------

DC CHARACTERISTICS (Refer to DC test circuit)

V_s	Supply voltage		8		18	V
V_o	Quiescent output voltage (pin 4)		6.4	7.2	8	V
I_d	Quiescent drain current (pin 5)			45	80	mA

AC CHARACTERISTICS (Refer to AC test circuit, $G_v = 40 \text{ dB}$)

P_o	Output power	$d = 10\%$ $V_s = 16V$	$f = 1 \text{ kHz}$ $R_L = 4\Omega$ $R_L = 2\Omega$ $R_L = 4\Omega$ $R_L = 2\Omega$	4.8 7	5.2 8 6.5 10		W W W W
$V_i(\text{rms})$	Input saturation voltage			600			mV
V_i	Input sensitivity		$f = 1 \text{ kHz}$ $P_o = 0.5W$ $P_o = 0.5W$ $P_o = 5.2W$ $P_o = 8W$		15 11 55 50		mV mV mV mV
B	Frequency response (-3 dB)	$R_L = 4\Omega$	$P_o = 1W$		40 to 15 000		Hz
d	Distortion		$f = 1 \text{ kHz}$ $P_o = 0.05 \text{ to } 3.5W$ $P_o = 0.05 \text{ to } 5W$		0.2 0.2		% %
R_i	Input resistance (pin 1)	$f = 1 \text{ kHz}$		70	150		$\text{k}\Omega$
G_v	Voltage gain (open loop)	$R_L = 4\Omega$	$f = 1 \text{ kHz}$		80		dB
G_v	Voltage gain (closed loop)	$R_L = 4\Omega$	$f = 1 \text{ kHz}$	39.5	40	40.5	dB
e_N	Input noise voltage (*)				4		μV
i_N	Input noise current (*)				60		pA
η	Efficiency		$f = 1 \text{ kHz}$ $P_o = 5.2W$ $P_o = 8W$		68 58		% %
SVR	Supply voltage rejection	$R_L = 4\Omega$ $R_g = 10 \text{ k}\Omega$ $f_{\text{ripple}} = 100 \text{ Hz}$		30	35		dB

(*) Filter with noise bandwidth: 22 Hz to 22 KHz.