



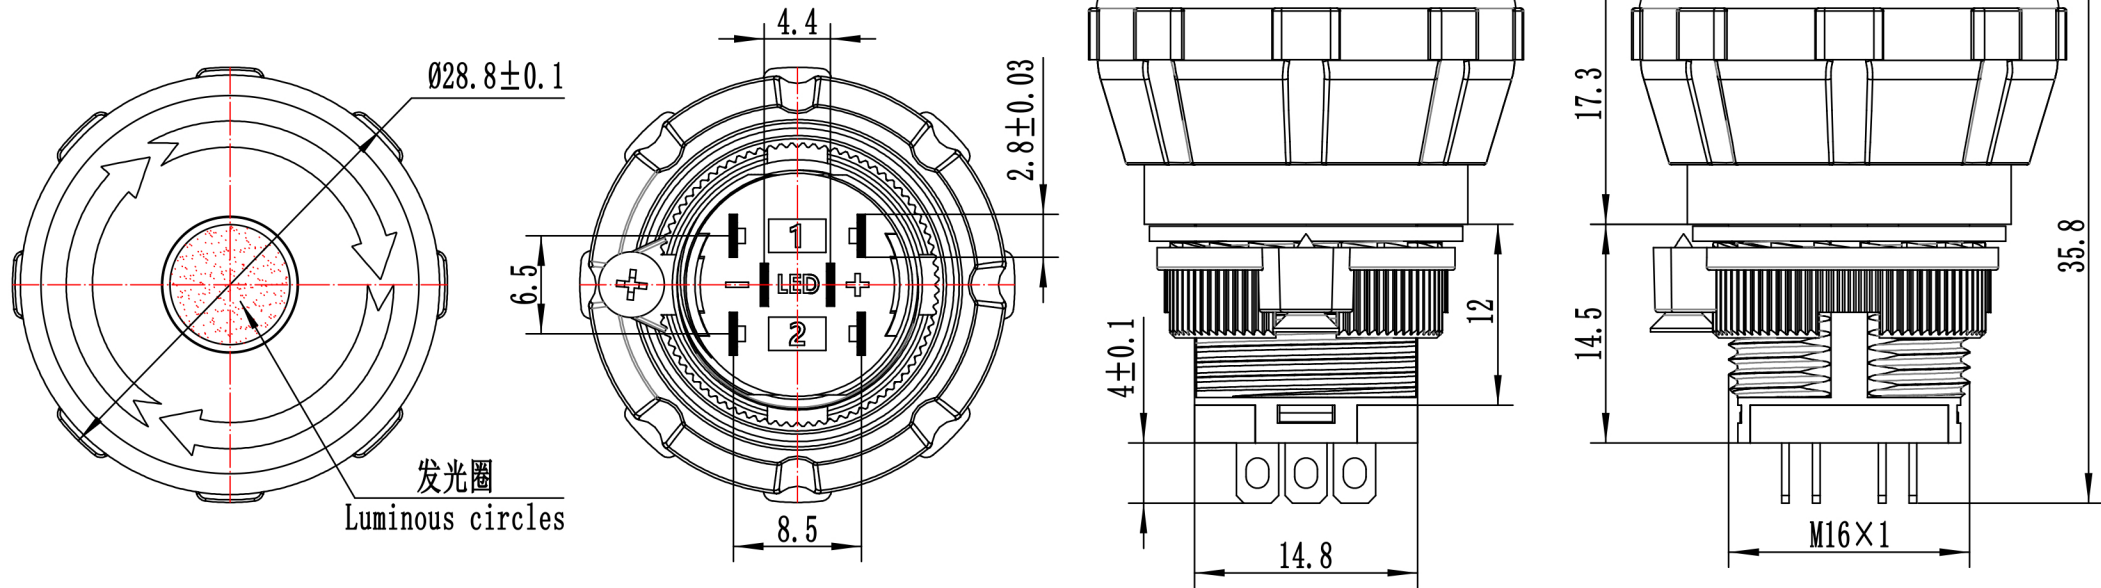

Mounting hole diameter 安装孔直径	16~16.2mm		Switch combinations 开关组合	1NO/2NO/1NC/2NC/1NO1NC/2NO2NC (一常开/二常开/一常开/二常开/一常开一常开/二常开二常开)	Housing material 外壳材质	PA66 nylon PA66尼龙
Switching voltage 开关电压	1.5V~250VAC/DC		Lamp bead voltage 灯珠电压	AC/DC: 3.3V、6V、9V、12V、24V、36V、48V	Key Material 按键材质	PA66 nylon PA66尼龙
Current rating: 额定电流:	Resistive loads 阻性负载	DC-13:12V/24V 5A	Lamp bead current 灯珠电流	2mA~20mA	Contact material 触点材质	Silver tin oxide alloy contacts 银氧化锡合金触点
	Inductive loads 感性负载	AC-15:110V/250V 1A	PIN pin style PIN脚样式	2.8mm Solder pins 2.8mm 焊接引脚	Electrical life 电气寿命	DC-13:12V/24V 5A >100,000 times AC-15:110V/220V 5A >10万次
Rated heating current 额定发热电流	ith: 5A/250VAC		Base material 基座材质	Modified nylon PA66 改性尼龙PA66	Contact resistance 接触阻值	Contact resistance ≤50mΩ
Waterproof rating 防水等级	IP65 at the end of the button Customizable IP67 端面防水标准IP65 定制IP67		Dielectric strength 绝缘强度	≥100MΩ 500VDC /h	Press down on pressure 按键下压力	Approximately 2.5~4N 约2.5~4N
Ambient temperature 环境温度	-30℃~85℃		Compressive strength 耐压强度	Pins and housings 1500VAC 20mA/min 引脚与外壳 1500VAC 20mA/min	Button travel 按键行程	The key stroke is 3mm and the contact stroke is 1mm 按键行程3mm 接触行程1mm
Form of work 工作形式	Self-locking/self-resetting (optional) 自锁式/自复式 (可选)		Glowing color 发光颜色	Red, green, yellow, blue, white 红、绿、黄、蓝、白		

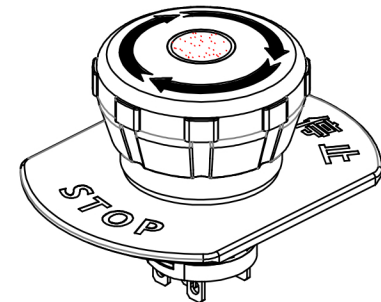

3D View: 三维视图:	Schematic Diagram: 电气原理:	Cut-out size: 开孔尺寸:	PART NAME: WD16T Series Emergency Stop Pushbutton Switch Datasheet 零件名称: WD16T系列急停按钮开关规格书	MATERIAL: / 材料: /	DRAWN: 彭翔翔 日期 2024.03.10 绘图: 彭翔翔 日期 2024.03.10	WEIGHT(g): 10 重量: 10
			PART No.: WD16T-M11-GGS01 零件编号: WD16T-M11-GGS01	SCALE: 2:1 比例: 2:1	CHECK: 彭翔翔 日期 2024.03.10 审核: 彭翔翔 日期 2024.03.10	UNIT: mm 单位: mm
				SHEET: 1 OF 1 页数: 第 1 页 共 1 页	APPROVAL: 彭翔翔 日期 2024.03.10 批准: 彭翔翔 日期 2024.03.10	SIZE: A4 图幅: A4
				PART No.: / 料号: /	VERISON: V0.0 版本: V0.0	PROJECTION: 投影: 第三角投影