

isc Adjustable Voltage Regulator**LM317K****FEATURES**

- Output Voltage Range :1.2V to 37V
- Output Current In Excess of 1.5A
- 0.1% Line and Load Regulation
- Floating Operation for High Voltage
- Complete Series of Protections:
Current Limiting,
Thermal Shutdown and SOA Control.

DESCRIPTION



- For use as positive adjustable voltage regulators.
- Designed to supply more than 1.5A of load current with an output voltage adjustable over a 1.2 to 37V range.
- The nominal output voltage is selected by means of only a resistive divider , making the device exceptionally easy to use and eliminating the stocking of many fixed regulators.

ABSOLUTE MAXIMUM RATING($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
$V_i - V_o$	Input-output Differential Voltage	40	V
I_o	Output Current	1.5	A
P_D	Power Dissipation	Internally Limited	W
T_{OP}	Operating Junction Temperature	0~125	°C
T_{STG}	Storage Temperature	-65~125	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	4	°C/W
$R_{th j-a}$	Thermal Resistance,Junction to Ambient	35	°C/W

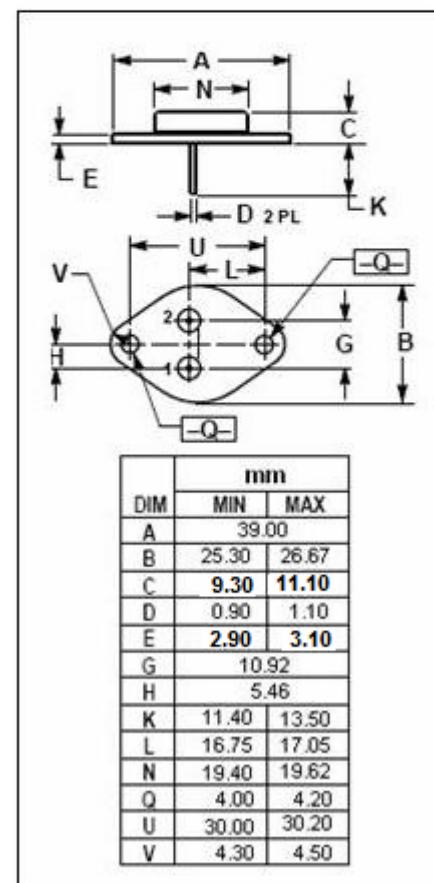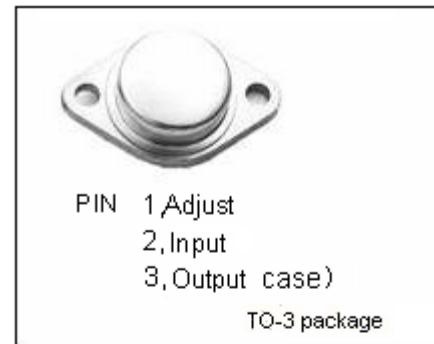

isc Adjustable Voltage Regulator**LM317K****• ELECTRICAL CHARACTERISTICS**(V_i -V_o =5V, I_O=0.5A ,I_{MAX}=1.5A ,P_{MAX}=20W,unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{REF}	Reference Voltage	V _i -V _o = 5V; I _O = 40mA to 500mA,	1.2	1.25	1.3	V
△V _O	Line Regulation	V _i -V _o = 3V to 40V; I _O = 500mA			0.05	% / V
△V _O	Load Regulation	V _i -V _o = 5V; I _O = 10mA to 1.5A			1.0	%
I _{ADJ}	Adjustment Pin Current	V _i -V _o = 5V; I _O = 40mA to 500mA			100	μ A
△I _{ADJ}	Adjustment Pin Current	V _i -V _o = 3V to 40V; I _O = 40mA to 500mA			5	μ A
△I _{ADJ}	Adjustment Pin Current	V _i -V _o = 5V; I _O = 10mA to 1.5A			5	μ A
S _{VR}	Ripple Rejection	V _o = 10V; I _O = 500mA; V _i -V _o = 5V; f = 100Hz, C _{ADJ} = 10 μ F	66			dB